


### COLOUR FINISHES


SILVER



### DIMENSIONS

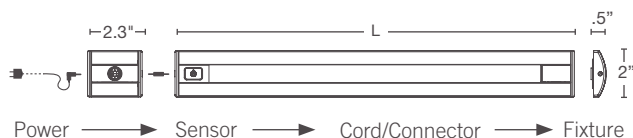

### ANGLE MOUNT OPTION



\*Cannot deviate from the above sequence when using an occupancy sensor.

\*Allow 2" on each end for interlink or power supply plug connection.

### SPECIFICATIONS

#### LENGTHS:

17", 31", 44", 58"

#### VERSIONS:

standard or high output

#### LED RATED LIFESPAN:

50,000 hours

#### COLOR TEMPERATURE:

3500K

#### COLOR RENDERING INDEX:

84

#### DIMMING:

touch-and-hold

#### BRIGHTNESS ADJUSTABILITY:

100%–15% continuous

#### OCCUPANCY SENSOR:

powers off after 30 minutes of inactivity

#### AUTO SHUT OFF:

after 10 hours

#### STANDARD COLOR FINISH:

silver, white end caps

#### MATERIAL:

anodized aluminum with plastic end caps

#### CORD LENGTH:

9' with 18 watt power supply  
12' with 60 watt power supply

#### CORD COLOR:

black - standard  
white

#### MOUNTING:

Fixture includes magnet and screw mount

#### CERTIFICATIONS:

ETL listed, compliant to  
UL 153, TAA, BAA,  
CSA C22.2 #9  
NYC #50472  
CEC Title 20

#### SENSOR:

Certified: UL 153 portable  
luminaire accessory  
CSA C22.2 #12

#### WARRANTY:

10 years fixture  
5 years power supply

### LENGTH SPECIFICATIONS

REED PREMIER	SUGGESTED SHELF SIZE	LENGTH	# LEDS	LUMEN	FC	WATTAGE	SYSTEM
17" Standard Output	24"-36"	16.4"	24	501	76	6.6	9.6
31" Standard Output	42"-48"	30.1"	48	984	131	14.8	18.5
44" Standard Output	54"-60"	43.7"	72	1488	148	21.8	27.4
58" Standard Output	≥ 72"	57.4"	96	1966	151	28.2	35.7

### SPECIFYING NOTES

- 60 watt power supply is required when interlinking.
- Total interlinked system wattage cannot meet/exceed 60 watts.
- Not recommended to interlink standard & high output versions.
- Cannot interlink 58" High Output (RP.58.HO) fixtures.
- Cannot interlink Reed Premier and Reed Classic.
- One occupancy sensor needed per string of interlinked fixtures.

### ENVIRONMENTAL

- Material content recyclability by weight:
  - Aluminum - 77%
  - Plastic - 6%
  - Steel - 1%
  - Other - 5%
  - Non-recyclable electronic content - 11%
- Contains 35% pre-consumer recycled material by weight.
- 89% post-consumer recyclability by weight.
- Mercury-free LEDs.