



SWIFTSPACE | DUO

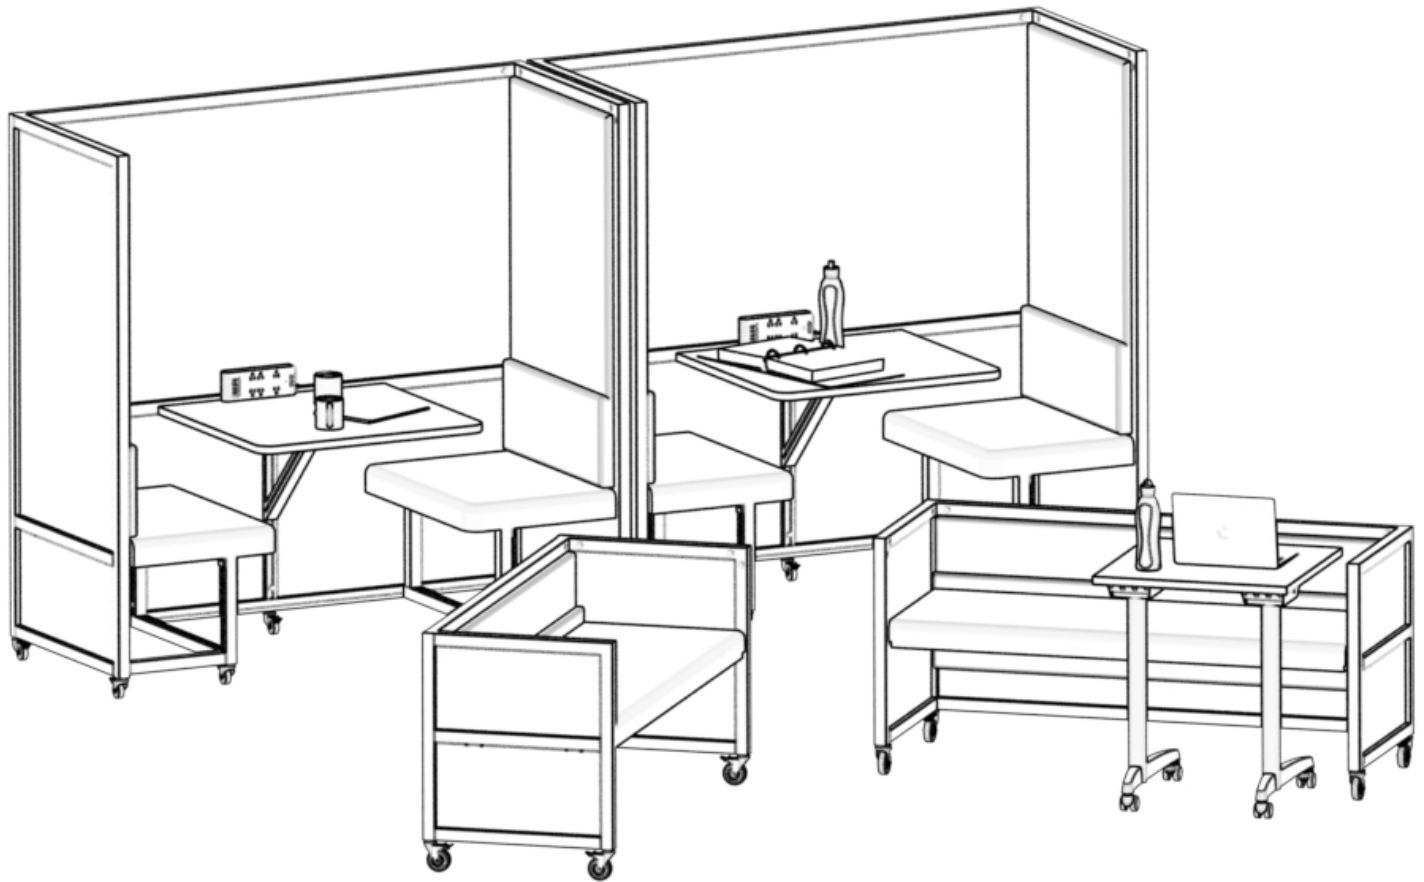

BENEFITS

Swiftspace is designed for flexibility, productivity, reducing costs, saving time and removing pain-points.



No loose parts to manage.



Minimal tools required.



No installers needed - it's DIY easy.



Reduce costs.



Installs in minutes, not hours





No punch list saves time.

Scope of Product

DUO is a straight, single configuration constructed with HPL panels. It is non-folding, but fits through standard doorways and comes in various combinations of wall heights and lengths. It is mobile, with casters that swivel and lock. DUO is available as either a booth or bench.


Breadth of Offering

- DUO meeting booth can comfortably accommodate seating for two with a shared worksurface. Duo bench can provide seating for up to three people.
- DUO comes in a standard width of 68" (1727mm).
- DUO booths come in standard heights of 52" (1321mm) and 66" (1676mm) while Duo benches come heights of 41 (1041mm), 52 (1321mm) and 66 inches (1676mm).
- DUO booth and bench depth: 29" (737mm).
- Standard worksurface size is 27"D (686mm) x 30"W (762mm).
- Upper back panel finishes include semi-clear poly, laminate, whiteboard, fabric tackboards, Ezo sound-dampening panels and acrylic (clear and frosted). When the station is ordered in laminate or whiteboard it can be slotted for easy removal of the panel. This allows the station to be paired with another station to create a 4 - 6 person meeting space
- Accessories include options for a pull-out worksurface that is attached with a slide to the main surface adding an additional 14" (356mm) depth of surface and an Ezo canopy that helps to reduce sound travel from the booth.
- For additional height and privacy requirements, panel extenders can be added. Panel extenders come in acrylic, Ezo or laminate finishes.

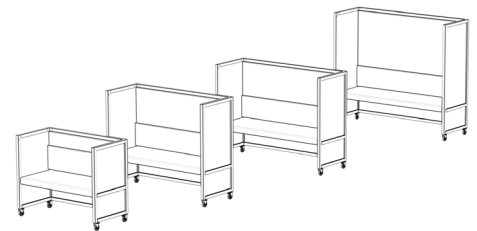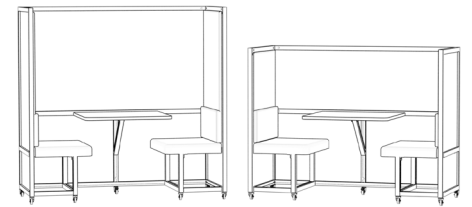

System Engineering

- **DUO is designed to fit through doorways and so does not fold up.*** With the exception of some accessories such as the Ezo canopy, all component parts are **fully assembled into the booth or bench at the factory before shipping.***
- **DUO is equipped with heavy-duty steel ball bearing casters with rubber wheels that are designed to go over thresholds, dockplates and other rough terrain without damage*.**
- DUO Single can support weight up to 500lbs, Duo double can support weight up to 500lbs/seat, Duo bench can support up to 1000lbs.

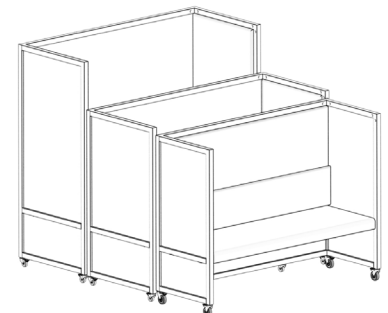

Construction


- DUO frame is constructed of 1.6"(40.64mm) lightweight, clear-anodized aluminum frame.
- Worksurface is 1" (25.4mm) thick high pressure laminate with a 45lb density particleboard core, .08" (2mm) edging.
- Castors are 2.5" (64mm) in diameter with grey non-marking rubber wheels that swivel and lock. They can be removed and replaced with adjustable glides that have 1" (25.4mm) of height adjustment for surface leveling on uneven floors.

Installation and Warranty

- Can be installed or serviced directly by the user or any common furniture installer and not violate or void any product warranty. Installation will not require any tools or professional training.
- Station **ships fully assembled on casters; the entire station will be one unit with no separate pieces, except for any mobile storage or some accessories that are to be attached after installation.***
- For product warranty please see Conditions of Sale, Return Policy, and Warranty in the Specification and Price Guide

Electrical

- Power can be handled on an individual station basis using a detachable powerbar with a 15ft power cord.
- Optional power bar comes with 6 electrical outlets and 4 USB ports.
- A power/data rail can be added to the lower back of the station. The raceway has 2 channels; the top channel is used to run power cables or hardwired power while the bottom (metallically separated from the top) can support up to 40 CAT6 data cables or phone lines.

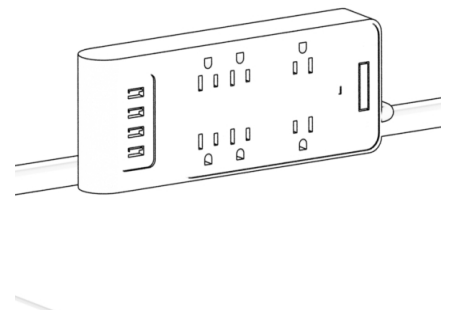

**Key Product Feature*

***All Swiftspace workstations have been tested and meet ANSI/BIFMA standards.*