



SWIFTSPACE | SHIFT

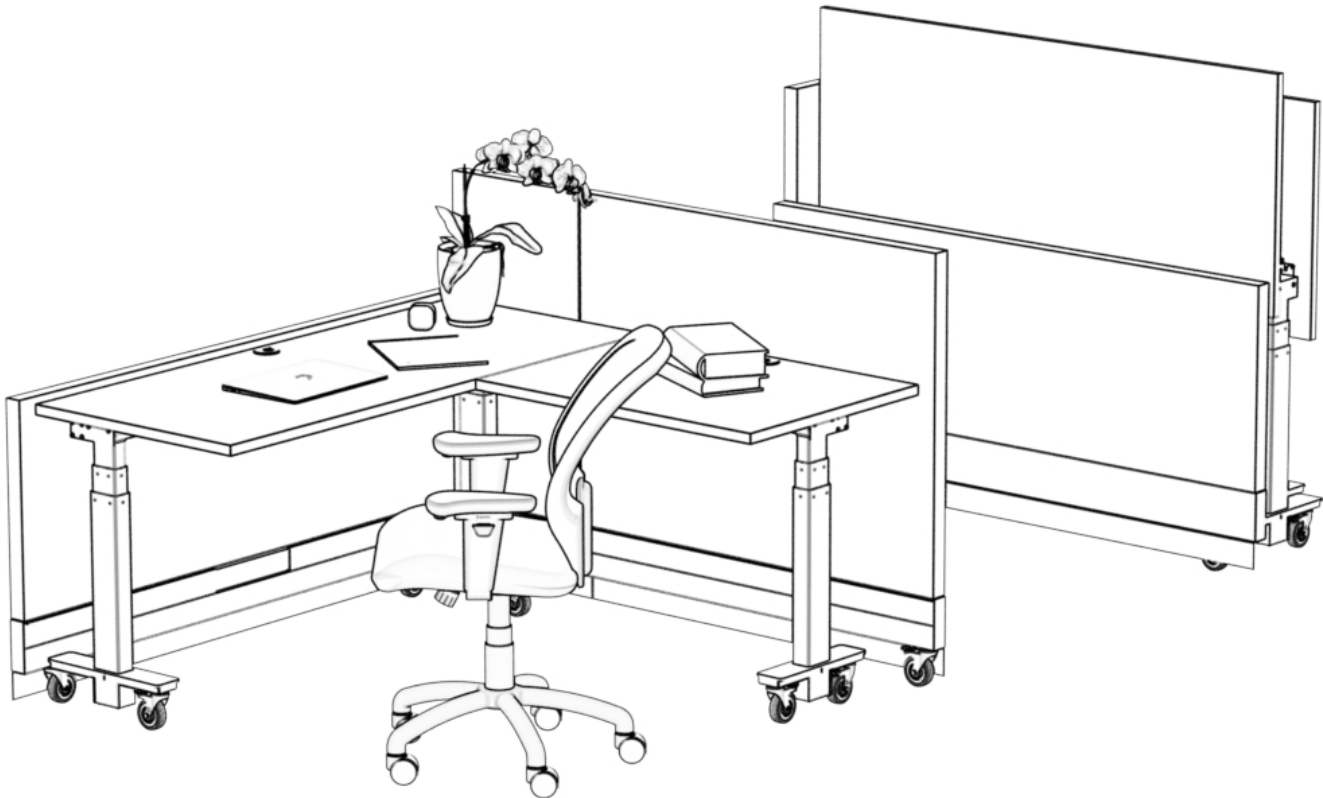

BENEFITS

Swiftspace is designed for flexibility, productivity, reducing costs, saving time and removing pain-points.



No loose parts to manage.



Minimal tools required.



No installers needed - it's DIY easy.



Reduce costs.



Installs in minutes, not hours






No punch list saves time.

Scope of Product

Shift is a mobile L-shaped dual worksurface configuration that comes in various combinations of wall heights and lengths. **It folds to 25% of its set-up size, and sets back up with no tools in under a minute***. Walls are HPL panels with exposed powdercoated steel frame.


Breadth of Offering

- Standard wall lengths: 60" (1524mm), 72" (1829mm) and 96" (2438mm).
- Shift comes in heights of 29 (737mm), 41 (1041mm), 52 (1321mm) or 66" (1676mm).
- Upper panel options: Laminate comes standard. Whiteboard and stick-on Ezo sound dampening panels are also available.
- Worksurfaces can be height adjustable with a range of 21.9"- 48.1" (556mm - 1222mm) powered by a bluetooth controller or can be fixed height (set at 29"H (737mm) standard or custom height if requested).
- Accessories include but are not limited to; hanging accessory rails with paper trays, pen holders and binder holders as well as monitor arms, CPU holders, keyboard arms, bow front worksurfaces and transaction countertops.
- For additional height and privacy, panel extenders can be added. Panel extender come in acrylic, Ezo or laminate finishes.
- Overheads with locks are engineered to be placed anywhere along the system, not having to fit in predetermined positions.
- **Frame comes standard in White or Silver**

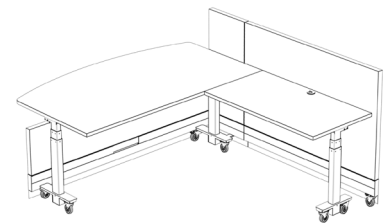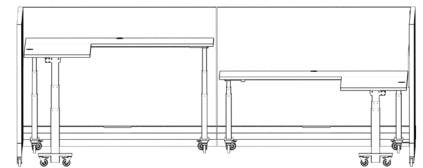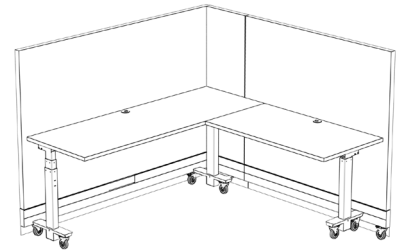

System Engineering

- Other than overheads, storage towers, freestanding pedestals, and clip on accessories, all **component parts are fully assembled at the factory into the workstation***.
- Shift is **equipped with heavy-duty steel ball bearing casters that are designed or go over thresholds, dockplates and other rough terrain without damage***.
- Shift return wall is split and hinged to allow the walls to fold around the closed worksurface. It is **engineered to be completely set-up in minutes without the use of any tools, additional hardware, parts or pieces. It can be setup and then folded down many times without loss of functionality***.
- Stations can be fixed in place using a castor lock or linking plate to link to next station. Locks can only be removed with a screwdriver. Locking Bracket available to prevent castor locking tab from becoming disengaged. Available upon request at no additional cost. 2 locks/station..



Construction


- Shift stations walls are constructed using 3/8" (10mm) honeycomb interiors that are proven to be lightweight but rigid.
- Worksurfaces are 1" (25.4mm) thick high pressure laminate with a 45lb density particleboard core, 0.08" (2mm) edging. Options for powdercoated, thermoformed, and solid surface available upon request.
- Castors are 2.5" (64mm) in diameter with grey non-marking rubber wheels that swivel and lock. They can be removed and replaced with adjustable glides that have 1" (25.4mm) of height adjustment for surface leveling on uneven floors.
- Castor covers are standard on Shift and slides into the bottom power/data rail of the station to hide casters. Once casters covers are installed the system is immobile unless covers are removed.

Installation and Warranty

- Can be installed or serviced directly by the user or any common furniture installer and not violate or void any product warranty. Installation will not require any tools or professional training and will take less than one minute.
- The station folds closed to 19.75" (502mm) wide for easy storage and movement in and out of elevators.
- Station **ships fully assembled on casters with the exception of some accessories.*** When folded for transportation or storage the entire station will be one unit with no separate pieces, except for any mobile pedestals or storage towers.
- For product warranty please see Conditions of Sale, Return Policy, and Warranty in the Specification and Price Guide.
- **Non Height Adjust stations can be upgraded to Height Adjustable in the field with our add-on kit**

Electrical

- Shift is equipped with a power/data raceway at the bottom of the station. The raceway has 2 channels; the top channel is used to run power cables or hardwired power while the bottom (metallically separated from the top) can support up to 40 CAT6 data cables or phone lines.
- Optional power bar comes with 6 electrical outlets and 4 USB ports.
- Power can be handled on an individual station basis using a detachable power bar with a 15ft power cord, or long runs of plug/play power can be accommodated using the integrated power/data bottom rail.
- For longer runs, a 4-circuit 80 amp quick connect/disconnect power system can be added in the Power and Data trough. Separate compartment for running up to 40 data cables.
- **Battery packs available for cordless operation of the station.** At full charge with a 1/2 load weight (125lbs) on the worksurface the battery will move the SHIFT worksurface all the way up and down approx. 35 times.

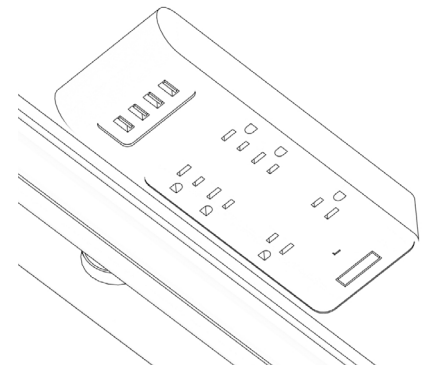

**Key Product Feature*

***All Swiftspace workstations have been tested and meet ANSI/BIFMA standards.*