


AMP



Scope of Product

Amp is a mobile L-shape dual worksurface configuration that comes in one standard height and available in two different wall lengths. **It folds to 15% of its open footprint, and sets back up in under a minute***. Walls are made of HPL hollowcore panels and framed with an edgeband.

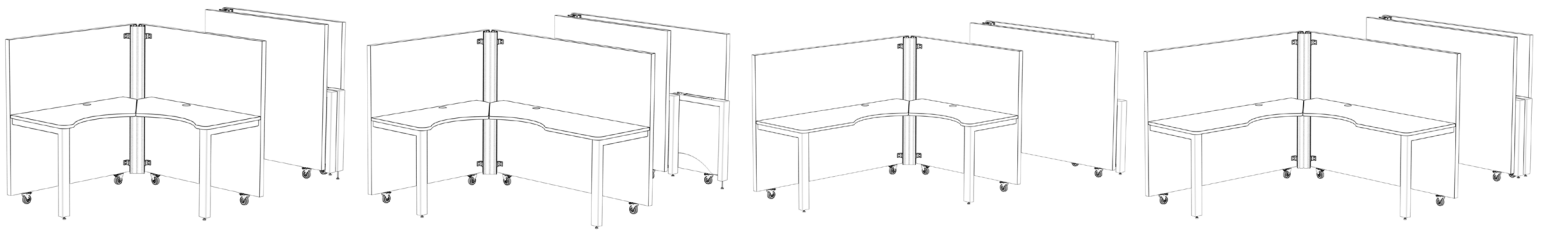

Dimensions

Heights: 52”H (1320.8mm). Additional heights available from 29”H (736.6mm) up to 63”H (1600.2 mm). on orders over 10 units.

Widths: 54.5” (1384.3mm) and 72” (1828.8mm).

- Amp comes standard with cockpit worksurfaces. Cockpit can be swapped out for straight surfaces at no charge for units over 10.

Finishes



- Panel and Worksurface finishes include Grey Elm or Fawn Cypress. All other 16 standard laminates are available for 10+ units.
- **Frame and Legs come standard in White**

Accessories

- Accessories include but are not limited to; power/ data troughs, accessory rails, monitor arms, stick-on PET acoustic panels, panel extenders, magnetic whiteboard plates and paper trays.
- Storage options include freestanding pedestals and towers.

System Engineering

- With the exception of Amp legs, storage and accessories, **all component parts are fully assembled at the factory into the workstation***. Amp legs comes fastened inside the station for convenient shipping and are easily installed on-site with provided thumbscrews.
- Amp is **engineered to be completely set-up in minutes without the use of any tools, additional hardware, parts or pieces. It can be setup and then folded down many times without the loss of functionality***.
- Equipped with **heavy-duty 650lb steel ball bearing casters with 2.5" (63.5mm) diameter grey non-marking rubber wheels that swivel and lock. These casters are designed to go over thresholds, dockplates, and other rough terrain without damage.* Casters can be hidden using a cover that slides into the optional bottom power/data rail of the station** (Once casters covers are installed the system is immobile unless covers are removed.)
- **Instead of casters, stations can be ordered with adjustable glides that have 1" (25.4mm) of height adjustment for surface leveling on uneven floors.***

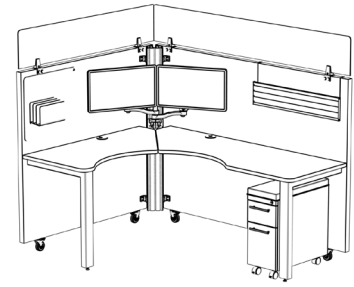

Construction



- Amp walls are constructed using 1.5" (38.1mm) honeycomb interiors that are proven to be lightweight but rigid.
- Worksurfaces are 1" (25.4mm) thick, with high pressure laminate and a 45lb density particleboard, 0.08" (2mm) edging. Options for powdercoated, thermoformed, and solid surface available upon request.
- Worksurfaces have a centered grommet to allow for ease of running cables and cords

Installation & Warranty

- Can be installed or serviced directly by the user or any common furniture installer and not violate or void any product warranty. Installation will not require any tools or professional training.
- The station folds closed to 11" (279.4mm) wide for easy storage and movement in and out of elevators.
- Station **ships fully assembled; the entire station will be one unit with no separate pieces***, except for legs, mobile storage or some accessories that are to be attached after installation.
- For product warranty please see Conditions of Sale, Return Policy, and Warranty in the Specification and Price Guide.

Electrical

- Optional power bar comes with 6 electrical outlets, 4 USB ports and a 15ft power cord.
- Power can be handled on an individual station basis using the detachable power or long runs of plug & play power can be accommodated using the optional add-on power/data raceway.
- The power/data raceway has 2 channels; the top channel is used to run power cables or hardwired power, while the bottom (metallically separated from the top) can support up to 40 CAT6 data cables or phone lines.
- For longer runs, a 4-circuit 80 amp quick connect/disconnect power system can be added in the power/data trough. Separate compartment for running up to 40 data cables.

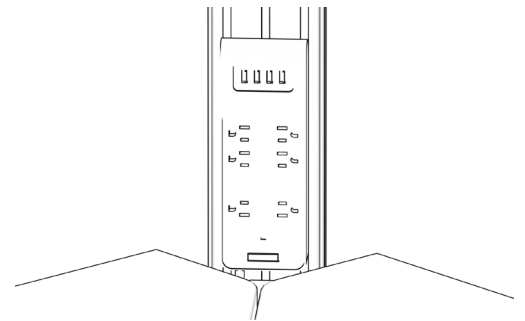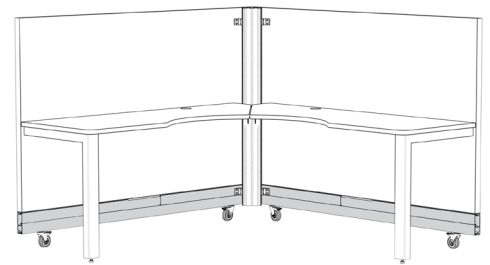

**Key product feature*

***All Swiftspace workstations have been tested and meet ANSI/BIFMA standards.*